

NOTES:

WHERE MULTI-LEVEL ROOFS MEET AT A COMMON WALL AND THE DIFFERENCE IN HEIGHT IS LESS THAN 3 FT (0.9M), THE ROOF STRIP OF THE UPPER ROOF AND THE ROOF STRIP OF THE LOWER ROOF ARE EACH TREATED AS FIELD AREAS, EXCEPT FOR THE SQUARE AREAS AT EACH END WHICH ARE TREATED AS PERIMETER AREAS.


THE WIDTH OF THE ROOF PERIMETER AND CORNER AREAS IS DEFINED AS THE SMALLER OF 0.1 TIMES THE BUILDING LESSER PLAN DIMENSION OR 0.4 TIMES THE EAVE HEIGHT (MEAN ROOF HEIGHT FOR SLOPES GREATER THAN 2"/12" SLOPE), EXCEPT FOR HEIGHTS GREATER THAN 60 FT.

ROOF PERIMETER - DISTANCE BETWEEN ROWS IS LESS THAN OR EQUAL TO 60% OF THE APPROVED ROOF FIELD SPACING OF THE ROWS OF FASTENERS.

ROOF CORNERS - DISTANCE BETWEEN ROWS IS LESS THAN OR EQUAL TO 40% OF THE APPROVED ROOF FIELD SPACING OF THE ROWS OF FASTENERS.

INCREASED FASTENING DENSITY IS OBTAINED BY USING NARROWER SHEETS, OR INTERMEDIATE ROWS OF FASTENERS INSTALLED THROUGH THE SHEET WITH A COVER STRIP APPLIED OVER THE FASTENERS.

REFER TO DETAILS MHT-MA-102A AND MHT-MA-102B FOR PERIMETER LAYOUT OPTIONS.

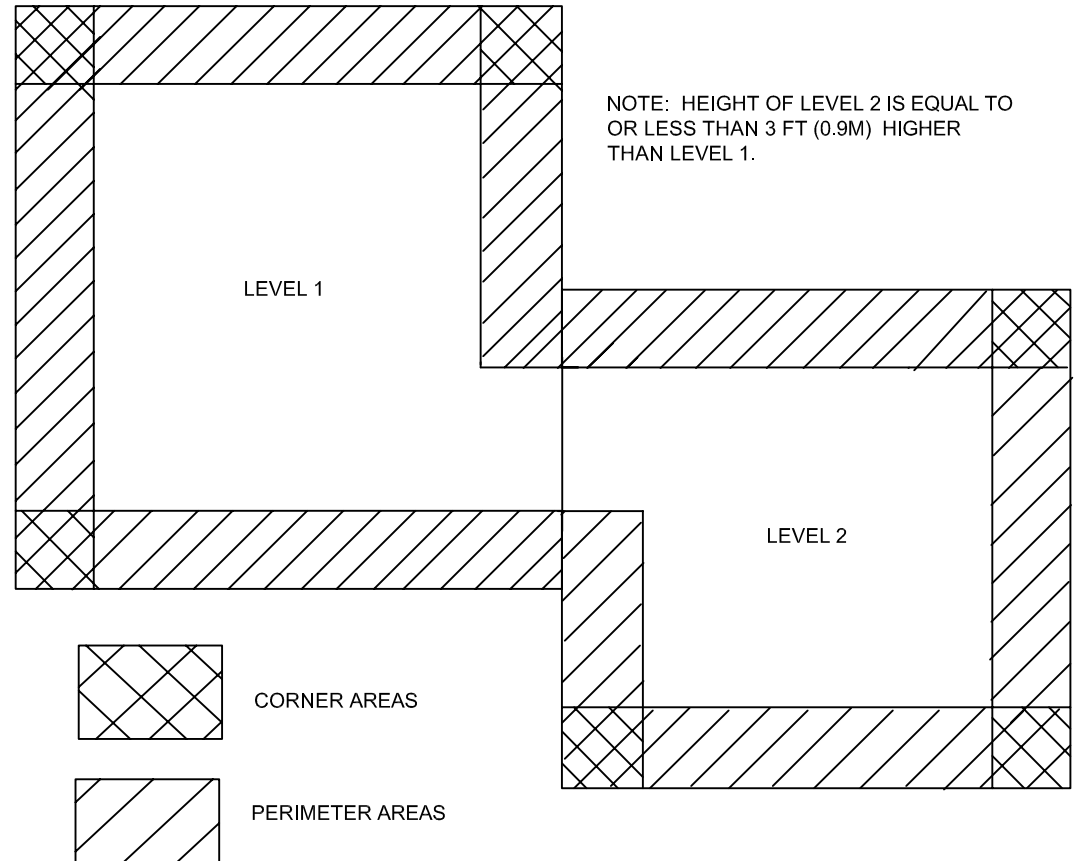

**MULE-HIDE
PRODUCTS CO., INC.
2006**

ROOF PERIMETER CALCULATION
TPO SYSTEMS: MECHANICALLY ATTACHED

DETAIL NO.:
MHT-MA-108B