



HD WOOD FIBERBOARD (1/2" MIN), DENS-DECK (1/4" MIN), AND POLYISOCYANURATE 1-1/2" (40 mm) THICK OR GREATER

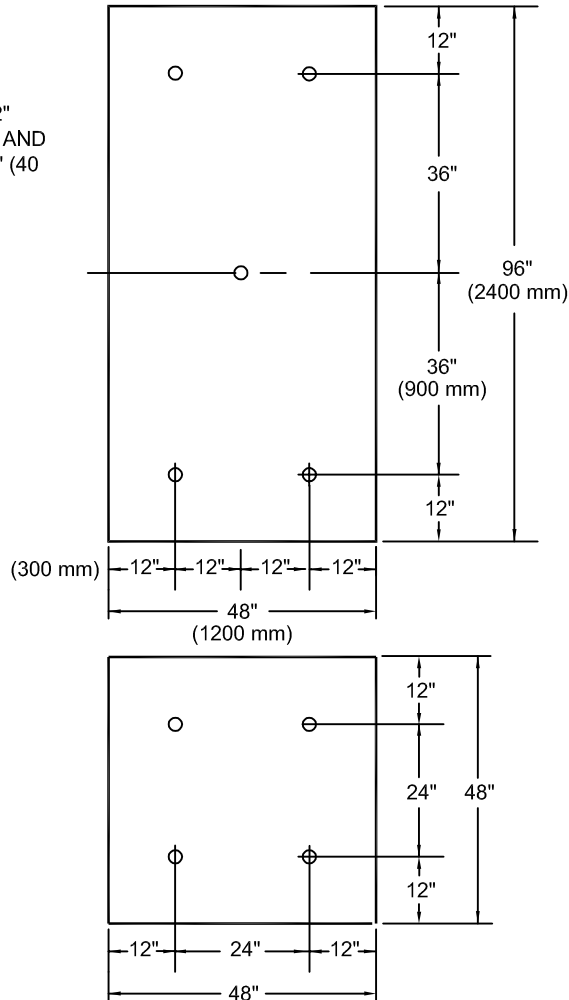

POLYISOCYANURATE INSULATION OR EQUAL LESS THAN 1-1/2" (40 mm) THICK

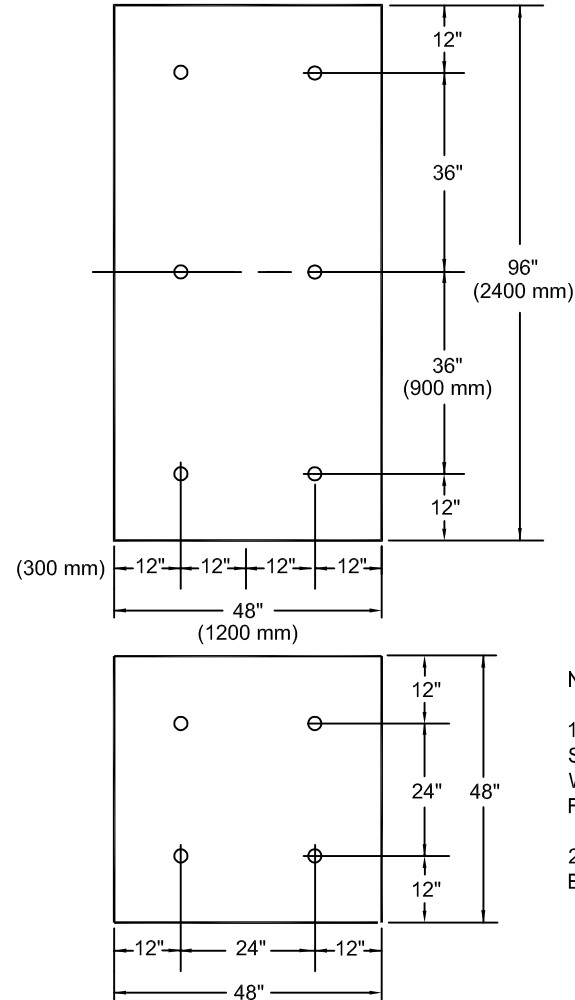

NOTES:

1. MULE-HIDE 3" (75 mm) METAL STRESS PLATES MUST BE USED WITH MULE-HIDE FASTENERS FOR INSULATION ATTACHMENT.
2. FASTENER TOLERANCE SHALL BE +1 INCH (25 mm).

**MULE-HIDE
PRODUCTS CO., INC.
2006**

INSULATION ATTACHMENT PATTERNS

TPO SYSTEMS: MECHANICALLY ATTACHED

DETAIL NO.:
MHT-MA-701