


624-A COUNTERFLASHING TERMINATION

NOTES:


1. COUNTERFLASHING SHALL BE ELEVATED ABOVE PONDED WATER.
2. NOT FOR USE ON 20 YEAR WARRANTY PROJECTS (REFER TO DETAIL 624-B).
3. BONDING ADHESIVE IS NOT REQUIRED WHEN FLASHING HEIGHT IS 12" (300 mm) OR LESS. FASTENERS MUST BE SPACED A MAXIMUM 12" O.C.

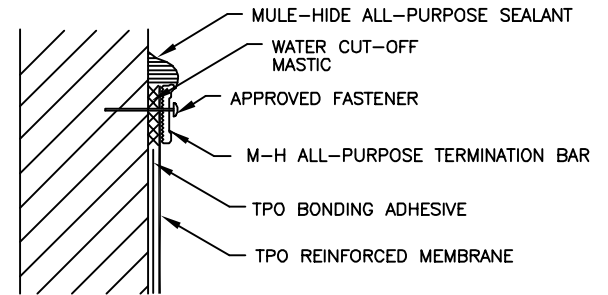

624-C MECHANICAL TERMINATION

1. FOR USE ON 20 YEAR WARRANTY PROJECTS.
2. ALLOW 1/4" to 1/2" (6 to 13 mm) SPACING BETWEEN CONSECUTIVE LENGTHS OF TERMINATION BAR.
3. BONDING ADHESIVE IS NOT REQUIRED WHEN FLASHING IS 18" (500 mm) OR LESS.


FOR USE ON 20 YEAR WARRANTY PROJECTS. TERMINATION BAR IS NOT REQUIRED ON 10 YEAR WARRANTY PROJECTS (REFER TO DETAIL 624-A)

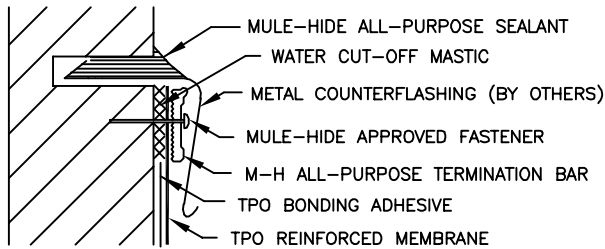

1. APPLY ON HARD SMOOTH SURFACE ONLY; NOT FOR USE ON WOOD.
2. DO NOT WRAP COMPRESSION TERMINATION AROUND CORNERS.
3. FASTENERS OF METAL BAR MUST PROVIDE CONSTANT COMPRESSION ON WATER CUT-OFF MASTIC.

624-B MECHANICAL TERMINATION

FOR USE ON 20 YEAR WARRANTY PROJECTS.

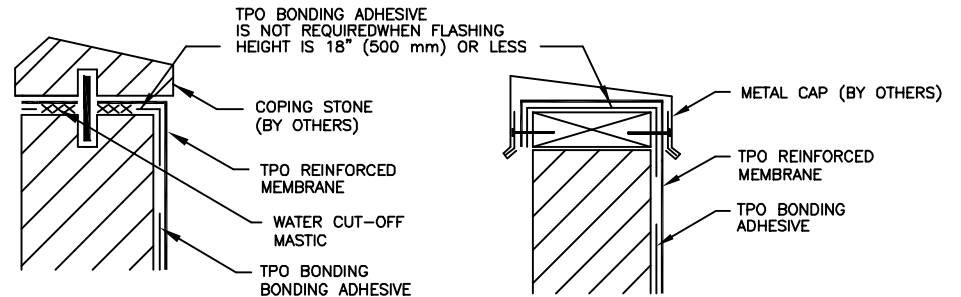

624-D COPING STONE TERMINATION

624-E CAP FLASHING TERMINATION

**MULE-HIDE  
PRODUCTS CO., INC.**  
2009

**TERMINATION DETAILS**

**SYSTEMS:  
TPO  
ALL**

**DETAIL NO.:**

**MHT-UN-624**