



MULE-HIDE

Modular Roofing Systems

Modular Product Application Reference Chart

TPO
Roofing System
Materials

		Coverage Rate	PEM Membrane	F-PEM Membrane	Mate-Line	Bridging	Walls	Pipe Boots	Heat-Welding Only	Pre-Cut Corners	Drains	Scuppers	Insert Bar
Water Base Bonding Adhesive	100 sf per gal (1 side)	Yes	Yes			Yes			Heat-Welding Only				
Solvent Adhesive	40 sf per gal (2 side)	Yes	Sub			Yes					Yes		
Water Cut Off	10 lf per tube					Yes	Yes				Yes	Yes	Sub
Header Strip for Mate-Line	8" x 108' rolls			Yes									
Bridging Material	100 lf roll				Yes								
PEM Flashing	30 lf roll										Yes		
Butyl Tape	50 lf roll												Yes


LEGEND:

Yes = Typical Application

Sub = Substitute Application

CUSTOMER SUPPORT
800-786-1492

Materials ordered for multi-unit setups should be laid out specific to individual modular units.

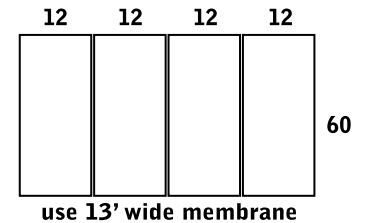



EPDM Roofing System Materials

Coverage Rate
EPDM Membrane
Mate-Lines
Self-Bridging Mate-Line™
Seaming
Metal Vents
Pipe Boots
Pipe Boots w/ Tape
Drains
Walls
Scupperets
Pourable Sealer Pockets
Pre-Cut Corners
Insert Bar

Water Base Bonding Adhesive	100-120 sf per gal (1side)	Yes												
Solvent Adhesive	60 sf per gal (2 side)	Sub								Yes				
Tape Primer	200 sf per gal		Yes	Yes	Yes	War/Alt 2	Yes	Yes			War/Alt 2	War/Alt 2	War/Alt 2	
Splice Adhesive	50 sf per gal (2 side)				Sub	War/Alt 1	Yes							
Lap Caulk	20 lf per tube					Yes	Yes	Yes	Yes			Yes	Yes	
Water Cut Off	10 lf per tube						War	War	Yes	Yes	War			Sub
Mate-Line Tape	65 or 100 lf rolls		Yes								Yes			
Backer Rod	100 lf roll			Yes										
Uncured Flashing	100 lf roll					War/Alt 1					War/Alt 1			
Uncured Flashing Tape	25 or 100 lf rolls					War/Alt 2					War/Alt 2			
RMS or RMS w/tape	100 lf rolls									Yes				
In-Seam Tape	100 lf roll				Yes									
Butyl Tape	50 lf roll					Yes								Yes

Use this easy Reference Chart to answer many of your application-related questions.

Materials ordered for multi-unit setups should be laid out specific to individual modular units.

12 12 12 12
60
use 13' wide membrane

CUSTOMER SUPPORT
800-786-1492

LEGEND:
Yes = Typical Application
Sub = Substitute Application
War = Required for System Warranty
War/Alt = Alternative to meet System Warranty requirement