


ASSEMBLY TB-1

10 OR 15 YEAR SYSTEM WARRANTY (WITH OR WITHOUT WRAP-AROUND WARRANTY)

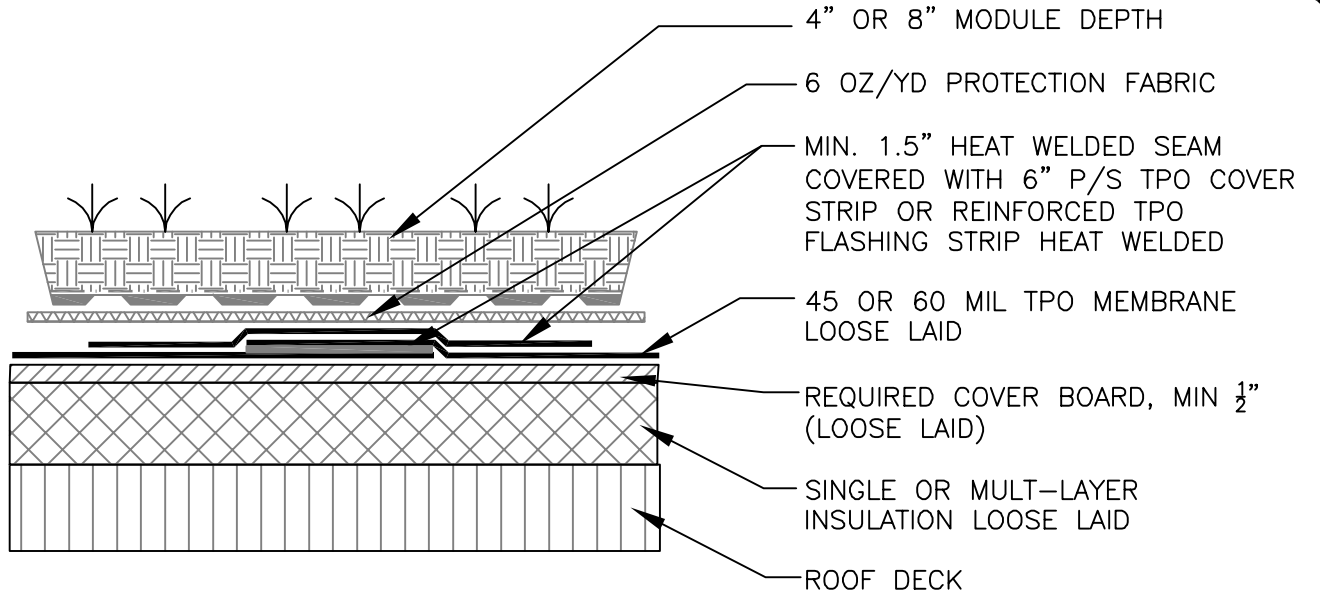

- 4" OR 8" MODULE DEPTH
- 6 OZ/YD PROTECTION FABRIC
- MIN. 1.5" HEAT WELDED SEAM COVERED WITH 6" P/S TPO COVER STRIP OR REINFORCED TPO FLASHING STRIP HEAT WELDED
- 45 OR 60 MIL TPO MEMBRANE LOOSE LAID
- REQUIRED COVER BOARD, MIN 1/2" (LOOSE LAID)
- SINGLE OR MULT-LAYER INSULATION LOOSE LAID
- ROOF DECK

4" OR 8" MODULE DEPTH

6 OZ/YD PROTECTION FABRIC


MIN. 1.5" HEAT WELDED SEAM COVERED WITH 6" P/S TPO COVER STRIP OR REINFORCED TPO FLASHING STRIP HEAT WELDED

45 OR 60 MIL TPO MEMBRANE LOOSE LAID

REQUIRED COVER BOARD (ADHERED ONLY)

SINGLE OR MULT-LAYER INSULATION MECHANICALLY ATTACHED OR ADHERED

ROOF DECK

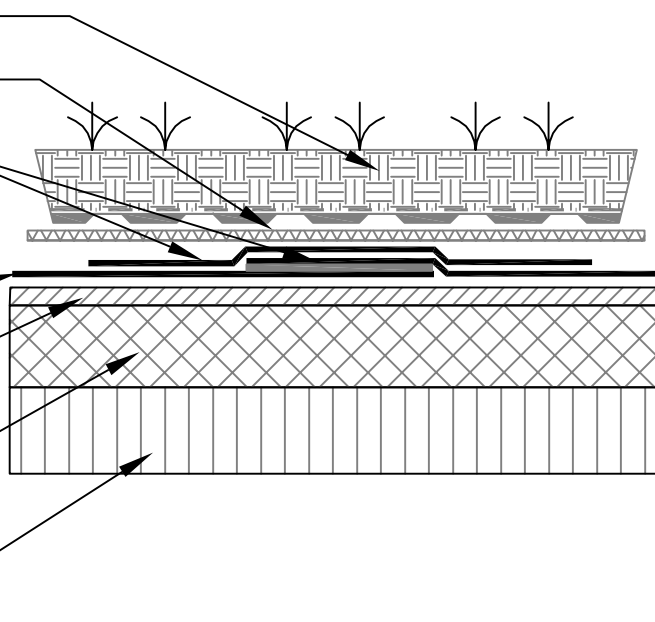

ASSEMBLY TB-2
10 OR 15 YEAR SYSTEM WARRANTY (WITH OR WITHOUT WRAP-AROUND WARRANTY)

MULE-HIDE PRODUCTS CO., INC.
AUGUST 2008

MULE-HIDE LIVING ROOF APPROVED ROOFING SYSTEMS
SYSTEMS:
TPO - BALLASTED LIVING ROOF ATTACHMENT I

DETAIL NO.:
MHGG-01C